




# SPL-4.0-2

*installation  
touring  
speaker  
100V Line*

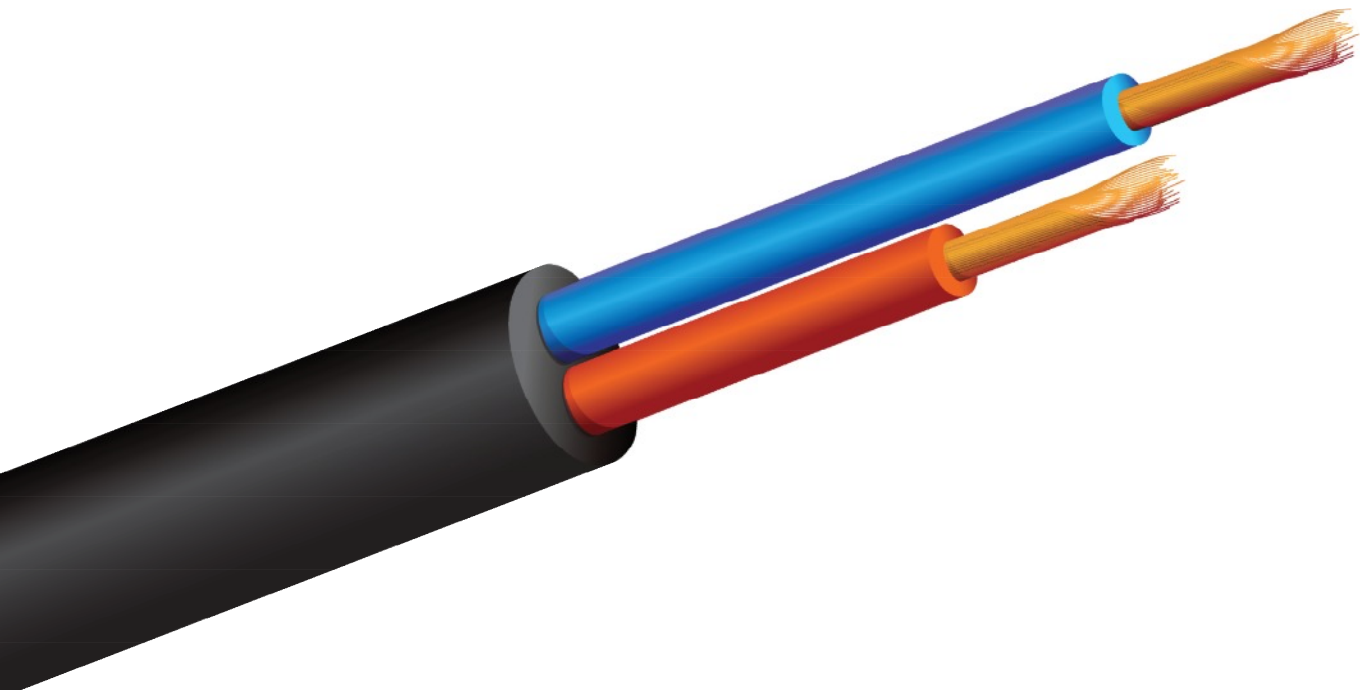


Kelsey SPL is a purpose-built range of professional speaker cables designed for use in the touring, hire and theatre sectors. The high-endurance polymer jacket offers excellent abrasion-resistance and impact protection while maintaining the internal core structure without kinks or twists. Core stranding is optimised for flexibility and high-frequency conductivity without compromising reliability or ease of termination. Each oxygen-free stranded copper conductor offers minimal resistance and low capacitance, with individual core jackets colour-coded for fast identification.

Built for optimum handling and electrical performance, SPL is one of the most flexible and easy to rig (even in cold conditions) professional speaker cables on the market.



# SPL-4.0-2

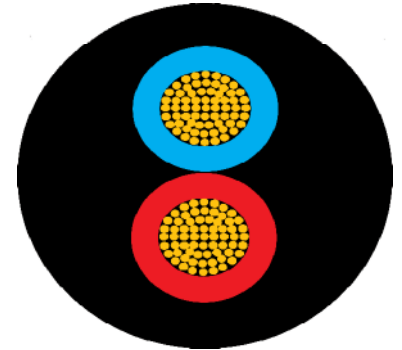

## SPECIFICATIONS

<i>Conductors</i>	<i>Material</i>	Stranded oxygen-free copper	
	<i>Size</i>	56 * 0.30mm (4.0mm <sup>2</sup> ) AWG 12	
<i>Insulation</i>	<i>Material</i>	PVC	
	<i>Diameter</i>	4.5mm +/-0.05mm	
	<i>Shorehardness (A)</i>	90 +/-3	
	<i>Colours</i>	Blue, Red	
<i>Outer Jacket</i>	<i>Material</i>	Soft PVC	
	<i>Colour</i>	Black, matt finish, RAL 9005	
	<i>Overall Diameter</i>	10.8mm +/-0.20mm	
	<i>Shorehardness (A)</i>	65 +/-3	
	<i>Weight kg/metre</i>	0.18	
	<i>Laying</i>	2 cores	
	<i>Drum Sizes</i>	500m, 100m, cut lengths	
	<i>Order Code</i>	KC.SPL-4.0-2	
<i>Technical Data</i>	<i>Test Voltage</i>	> 2kV at 50Hz, effective for 1 minute	
	<i>Insulation Resistance Min:</i>	20M Ohm/Km at 20°C	
	<i>Conductor Resistance Max:</i>	4.95 Ohm/Km at 20°C	
	<i>Temperature Rating</i>		Static: -20°C to +70°C
			Operating: -10°C to +70°C
	<i>Operating Voltage</i>	Max: 300V/500V AC/DC (Not suitable as a mains cable)	
			RoHS Compliant
<i>Printing Detail</i>	OFC 2X 4.0 SPEAKER/POWER CABLE		

E & OE, specifications and design subject to change without notice