




GP-2.5-2


Installation
Speaker
Control
100V Line

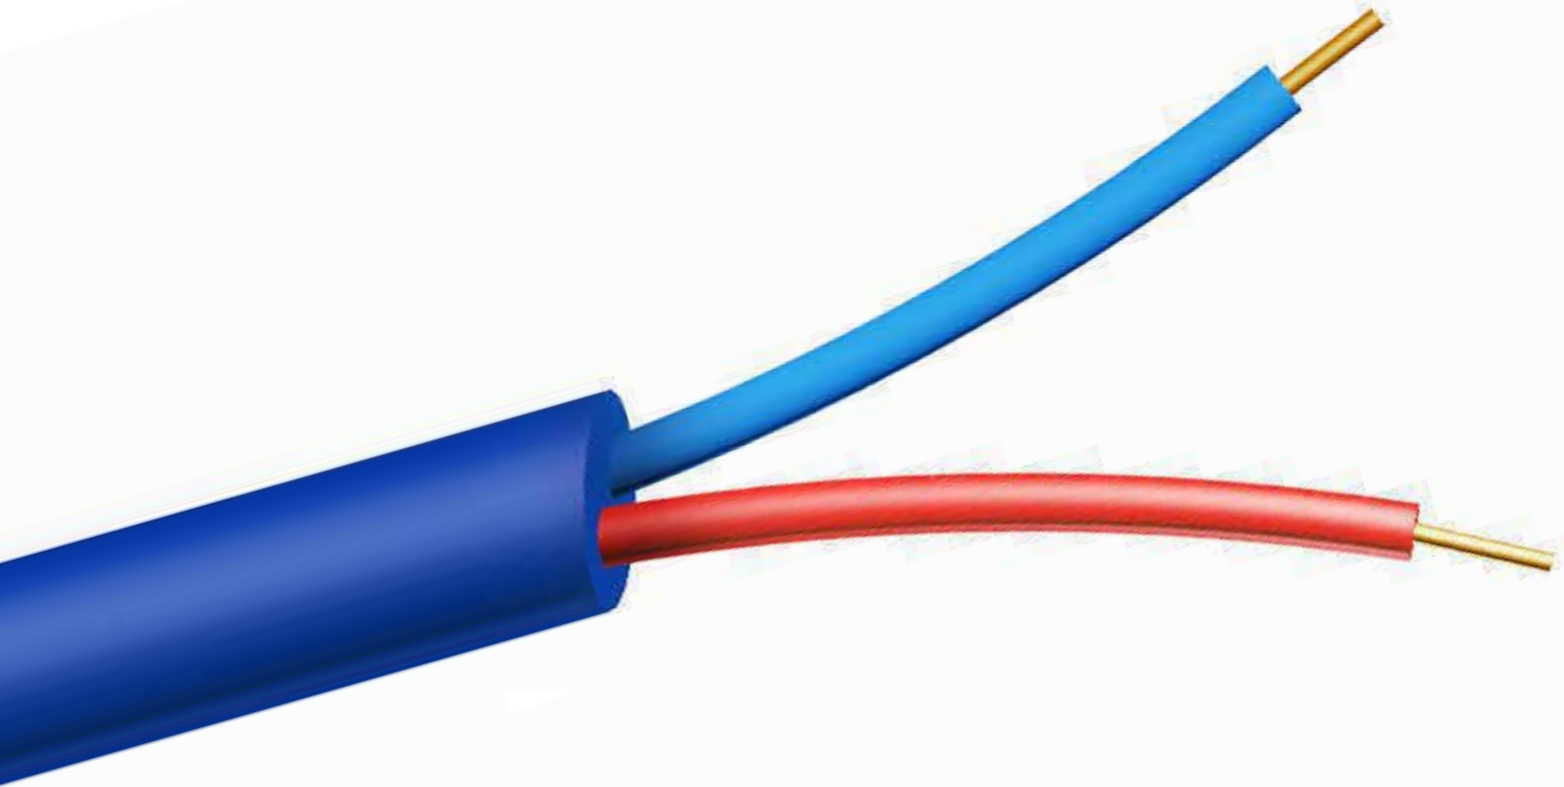

Kelsey General Purpose (GP) control speaker power cable is a purpose-built range of low cost install cable similar to YY types. Suitable for many applications from AV to professional sound or 100V line installations. The GP cables are manufactured from PVC outer jackets, that are flexible, easy to strip and anti-grip, making them ideal for on-site wiring. Fully tested at 4000V, the GP cables have a working voltage up to 500V.



GP-2.5-2

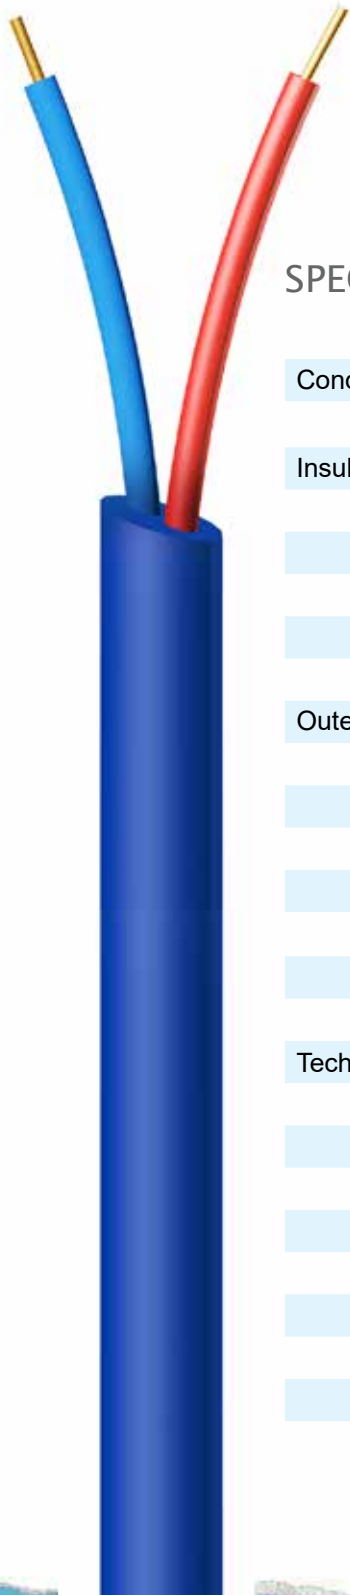

SPECIFICATIONS

Conductors	<i>Material</i>	Stranded HG Copper
	<i>Size</i>	2.5 mm ² (x2 Cores)
Insulation	<i>Material</i>	PVC
	<i>Diameter</i>	2.8mm +/-0.15mm
	<i>Shorehardness (A)</i>	90 +/-2
	<i>Colours</i>	Red and Blue
Outer Jacket	<i>Material</i>	Anti-Grip, Flixible PVC
	<i>Colour</i>	Blue, RAL 5010
	<i>Overall Diameter</i>	7.5mm +/-0.30mm
	<i>Shorehardness (A)</i>	82 +/-2
	<i>Drum Sizes</i>	100m and 500m cut lengths
	<i>Order Code</i>	KC.GP-2.5-2
Technical Data	<i>Test Voltage</i>	> 4kV at 50Hz, effective for 1 minute
	<i>Insulation Resistance Min:</i>	20M Ohm/Km at °20C
	<i>Temperature Rating</i>	Static: -4°C to °70+C
	<i>Operation Voltage</i>	Max: 500/300V AC/DC
	<i>Flamability</i>	IEC 2-1-60332
	<i>Minimum Bend Radius</i>	4xOD
		RoHS Compliant

E & OE, specifications and design subject to change without notice